




1 ● CLEAN SURFACES THOROUGHLY.
 ● RINSE AND LET DRY COMPLETELY.
 ● CUT **DURAMESH™** TO COMFORTABLE WORKING SIZE.
 ● APPLY **DRENCHCOTE™** IN A HEAVY COAT (30 mils THICK), SLIGHTLY WIDER THAN THE **DURAMESH™**.


2 ● PRESS **DURAMESH™** FIRMLY INTO WET **DRENCHCOTE™** TO OBTAIN MAXIMUM SATURATION FROM BELOW.
 ● ALLOW TO DRY THOROUGHLY.
 ● APPLY THICK COAT OF **DRENCHCOTE™** (30 mils THICK) TO THE NEXT ADJOINING SECTION AND PRESS **DURAMESH™** FIRMLY INTO THE WET **DRENCHCOTE™** WHILE LEAVING A 4" EDGE OF **DURAMESH™** UNSATURATED (DRY) TO SERVE AS AN OVERLAP OVER THE 1ST SECTION.
 ● ALLOW TO DRY THOROUGHLY (AVERAGE 3 TO 4 HOURS).
 ● CONTINUE STEPS 1 AND 2 OVER THE ENTIRE SURFACES

3 ● COMPLETE SATURATION OF **DURAMESH™** FROM THE ABOVE WITH A THICK COAT OF **DRENCHCOTE™**. WORK IN TO PENETRATE MESH.
 ● ALSO APPLY **DRENCHCOTE™** TO BOTH SIDES OF THE UNSATURATED OVERLAPPING EDGE, AND PRESS DOWN.
 ● ALLOW TO DRY THOROUGHLY.

4 ● APPLY EITHER TWO MORE THIN COATS OF **DRENCHCOTE™** OR ONE THIN COAT OF **DRENCHCOTE™** PLUS ONE COAT OF EXTERIOR PAINT.
 ● ALLOW EACH COAT TO DRY THOROUGHLY BEFORE APPLICATION OF NEXT COAT.
 ● FINAL TOTAL DRY FILM THICKNESS SHOULD BE APPROXIMATELY 80 mils.

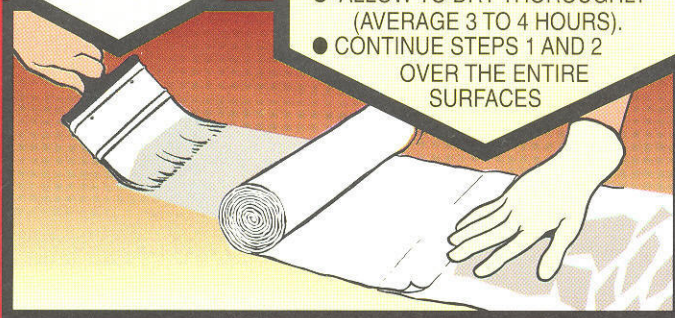


DRENCHCOTE™ WITH DURAMESH™ WILL WITHSTAND THE ELEMENTS AND PROTECT THE SURFACE EVEN IF THE SUBSTRATE SHOULD BECOME CRACKED.
DURAMESH™ is a stitch bond polyester membrane sold separately in 4 inch, 10 inch and 33 inch widths

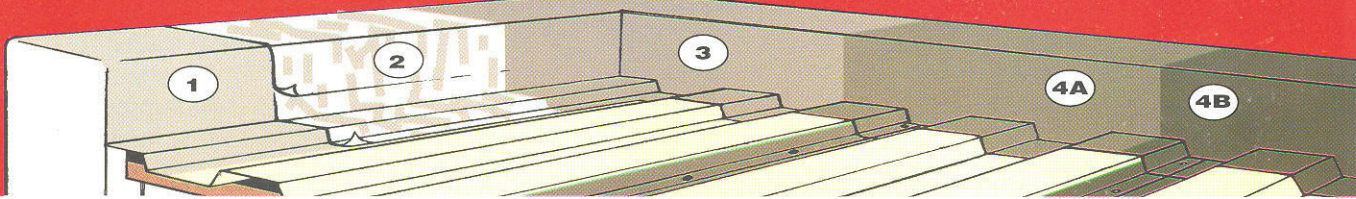

IMPORTANT

■ TOTAL COVERAGE OF **DRENCHCOTE™** WITH **DURAMESH™** IS APPROXIMATELY 1 GALLON PER 20 SQUARE FEET (WITH 4 COATS)

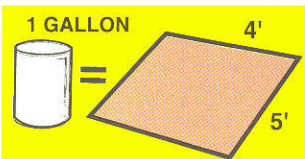

■ ON POROUS SURFACES ONLY, PRIME WITH 20% DILUTED **DRENCHCOTE™** OR MASONRY PRIMER



- USE WATER TO CLEAN TOOLS
- DO NOT USE **DRENCHCOTE™** UNDER TILES OR IN AREAS OF LONG-TERM PONDING



- IN COOL WEATHER, DARK COLORS ABSORB MORE HEAT FROM THE SUN AND DRY FASTER
- TO AID IN DRYING, A HEAT SOURCE CAN BE USED

■ AVERAGE TOUCH DRY: 2 TO 6 HOURS FOR INTERCOAT. AVERAGE FULL CURE: 7 DAYS



■ FOR OPTIMUM PERFORMANCE, RECOAT WITH A SINGLE LAYER EVERY 5 YEARS



■ DO NOT APPLY WHEN RAIN IS EXPECTED



■ COLOR RANGE: WHITE, BLACK, GREY, CHARCOAL, BRICK-RED, BROWN, TERRACOTTA, GREEN, WHITE & CLEAR. WHITE CAN BE TINTED AT YOUR PAINT STORE.

- ANTI-FUNGAL
- SHELF LIFE: 2 YEARS
- IDEAL TEMPERATURE FOR APPLICATION IS 32°F TO 82°F AND FOR STORAGE IS 34°F TO 85°F

PRECAUTIONS

- Keep out of the reach of children.
- Spraying areas should be well ventilated.

FIRST AID PROCEDURES:

- Avoid contact with skin or eyes. If product does come in contact with skin or eyes, rinse with clean, warm water. Call physician.
- Inhalation: remove to fresh air.
- Ingestion: drink one or two glasses of water to dilute.

DO NOT induce vomiting. Call physician. In event material is spilled, flush with water. Absorb with sawdust, sand, dirt or rags.

1542 Jefferson Street,
 Teaneck, New Jersey 07666
 Tel: 201-836-0733 Fax: 201-836-5220
 e-mail: cotel@sprynet.com
 http://home.sprynet.com/sprynet/cotel



OTHER QUALITY PRODUCTS FROM COTE-L INDUSTRIES

- **DURAMESH™**
- **DURABAK™**
- **DURABAK 18™**
- **DURAPRIME™**
- **PRIMECOTE™**
- **HP-STONE CHIP GUARD™**